

UNCLASSIFIED

AD NUMBER	
AD042887	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO: Approved for public release; distribution is unlimited.	
FROM: Distribution authorized to DoD only; Administrative/Operational Use; MAR 1954. Other requests shall be referred to Bureau of Ships, Washington, DC 20350.	
AUTHORITY	
BUSHIPS per ltr dtd 1 Apr 1968; BUSHIPS per ltr dtd 1 Apr 1968	

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD NUMBER	
AD042887	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO: Approved for public release; distribution is unlimited.	
FROM: Controlling DoD Organization: Bureau of Ships, Washington, DC 20350.	
AUTHORITY	
BUSHIPS per ltr dtd 1 Apr 1968; BUSHIPS per ltr dtd 1 Apr 1968	

THIS PAGE IS UNCLASSIFIED

Armed Services Technical Information Agency

Because of our limited supply, you are requested to return this copy WHEN IT HAS SERVED YOUR PURPOSE so that it may be made available to other requesters. Your cooperation will be appreciated.

AD

42887

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

Reproduced by
DOCUMENT SERVICE CENTER
KNOTT BUILDING, DAYTON, 2, OHIO

CONFIDENTIAL

**NOTICE: THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE
NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING
OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 and 794.
THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN
ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.**

AD NO. 424887

ASTIA FILE COPY

CONFIDENTIAL

SECURITY INFORMATION

*Referred
to the communication
Department, Inc.*

100 WASHINGTON AVENUE

NEW YORK, N. Y.

CONFIDENTIAL

SECURITY INFORMATION

CONFIDENTIAL

FURTHER DISSEMINATION IS AUTHORIZED ONLY TO
MILITARY AGENCIES.

PROGRESS REPORT NO. 22

TRAVELING-5050008ES

Index No 11613, Task 9

Contract N0bsr-57354

March 1954

5050069

*This Document contains information affecting
the National Defense of the United States
within the meaning of the Espionage Laws,
Title 18, U.S.C., Sections 793 and 794. Its
transmission or the revelation of its contents
in any manner to an unauthorized person is
prohibited by law.*

CASES 4 13 74
4 13 75

FEDERAL TELECOMMUNICATIONS CORPORATION
a Division of International Telephone and Telegraph Corporation

500 WASHINGTON AVENUE

MUTLEY 10 NEW JERSEY

Prepared By R. H. GRIGER
Approved By J. H. PRYANT
A. K. WING JER

COPY NO 6
April 1954

DEPARTMENT OF THE NAVY, BUREAU OF SHIPS
WASHINGTON, D C

CONFIDENTIAL

101

CONFIDENTIAL

PROGRESS REPORT NO. 22

TRAVELING-WAVE TUBES

Driver Tube

During the past interval Tubes Nos. 115 and 116 were constructed and tested. Tube No. 116 was a modification of Tube No. 114. It was stated in the last report that Tube No. 114 operated with a power output between 500 and 800 watts. During testing it was believed that beam current to the collector was low, but it was not possible to measure this quantity. In order to make this measurement, an isolated collector was added to the tube, and it was repumped as Tube No. 116. Tests on Tube No. 116 confirmed the belief that the beam transmission was low. The beam conversion efficiency was estimated to be 20 per cent.

In Tube No. 115 several major changes were incorporated. The T. P. I. of the helix was adjusted for 6500-volt operation, and a new type of electron gun was used. This is a Pierce-type converging-beam gun with a perveance of 1.75×10^{-6} . R-f testing was done while continuously pumping the tube. Peak output powers from 1200 to 1800 watts and electronic gain of 25 db were observed. While testing the tube, the water-cooled solenoid developed a shorted turn, and further testing was not possible. The tube was sealed off the vacuum system and is being held for further tests pending the receipt of a new solenoid. The improved performance indicates that the new electron gun and the beam produced by it improve the over-all performance and efficiency. The next series of driver tubes will incorporate this gun and helix.

Output Tube

Experimental Tubes Nos. 8 through 11 have been constructed and tested. These tubes incorporated various types of experimental slotted slow-wave structures. Figure 1 is a plot of two typical voltage and frequency curves for two of the

CONFIDENTIAL

-1-

54 AA

56101

CONFIDENTIAL

experimental structures employed. As can be noted, the voltage range for these structures is low. This is due, in part, to a high degree of dielectric loading produced by the helix supports. However, these data, in conjunction with a study of the dielectric loading effects, will enable a structure to be designed which will have the proper voltage and dispersion characteristics for operation with either the low- or high-perveance electron gun. The Pierce-type electron gun was completed and tested. The performance of this gun was according to the characteristics expected. Peak current up to 50 amperes at 40,000 volts operation was measured. With 1 kilowatt of average power in the beam, the grid vanes showed color, although serious heating effects were not observed. A second type of Pierce gun design is being constructed. This new design does not require a gridded anode structure, and it is anticipated that higher average powers can be obtained.

Program for the Next Interval

During the next interval several driver tubes will be constructed employing the new high-voltage electron gun. In addition, these tubes will employ further improvements in helix support and also in center loss design. The output tube slow-wave structure studies will continue, and emphasis will be placed on determining methods of supporting the structures. Quantitative data will be obtained on the effect of support structures on dielectric loading of the slow-wave structure. The new type of Pierce electron gun will be completed, and testing should begin.

Illustration

Fig. No.

Title

- | | |
|---|---|
| 1 | Voltage-Frequency Characteristics for Slotted Slow-Wave Structures
No. 1 and No. 2 |
|---|---|

CONFIDENTIAL

CONFIDENTIAL

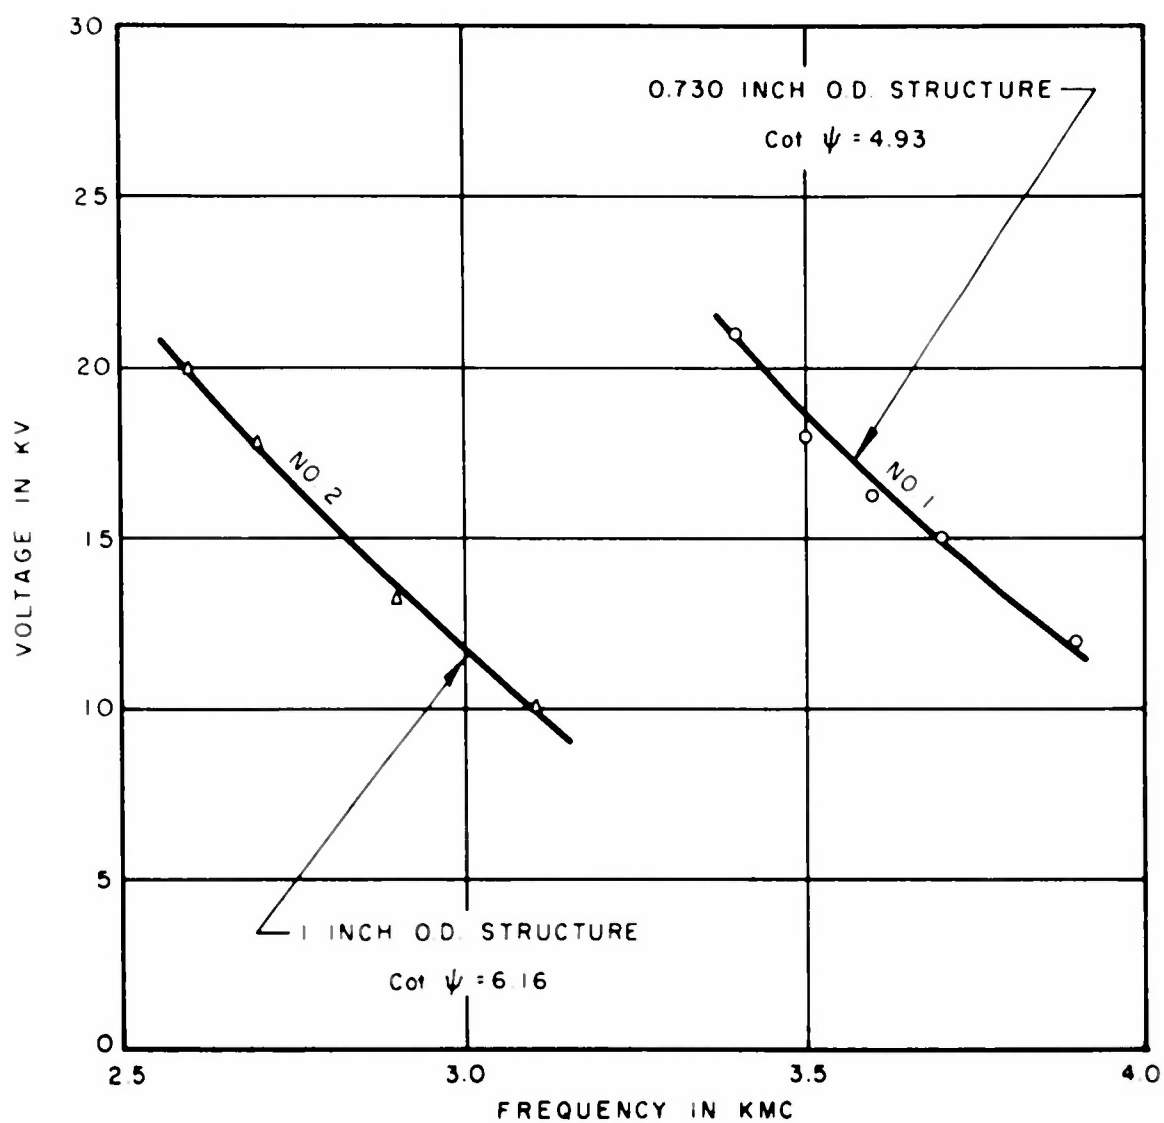


FIG. 1 VOLTAGE-FREQUENCY CHARACTERISTICS FOR SLOTTED SLOW-WAVE STRUCTURES NO. 1 AND NO. 2

CONFIDENTIAL

Armed Services Technical Information Agency

Because of our limited supply, you are requested to return this copy WHEN IT HAS SERVED YOUR PURPOSE so that it may be made available to other requesters. Your cooperation will be appreciated.

AD

42887

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

Reproduced by
DOCUMENT SERVICE CENTER
KNOTT BUILDING, DAYTON, 2, OHIO

CONFIDENTIAL